


### FEATURES

- Suitable for In-dash mounting (2-DIN size hole)
- On-dash mounting possibility
- High resolution 7" Digital TFT LCD panel
- Capacitive Touch Buttons
- Shutter camera support & camera Heater support
- 4 Camera Inputs & 1 AV Input
- Automatic Brightness Control (Day/Night)
- Auto Scan function
- Auto Power ON/OFF
- PAL/NTSC Compatible
- Multi-lingual On Screen Display control
- ABS housing (rubber coated)
- Built-in Speaker
- Electronic Distance Marker (Parking line & Horizontal line)
- Free Input voltage (DC 12V ~ 30V)
- Bracket rails and Heavy Duty mounting possibility
- Speedswitch function via tacho signal (in case of frontview purpose)
- Sunvisor and Bracket – included
- All connections via one multi-cable (no external controlbox)

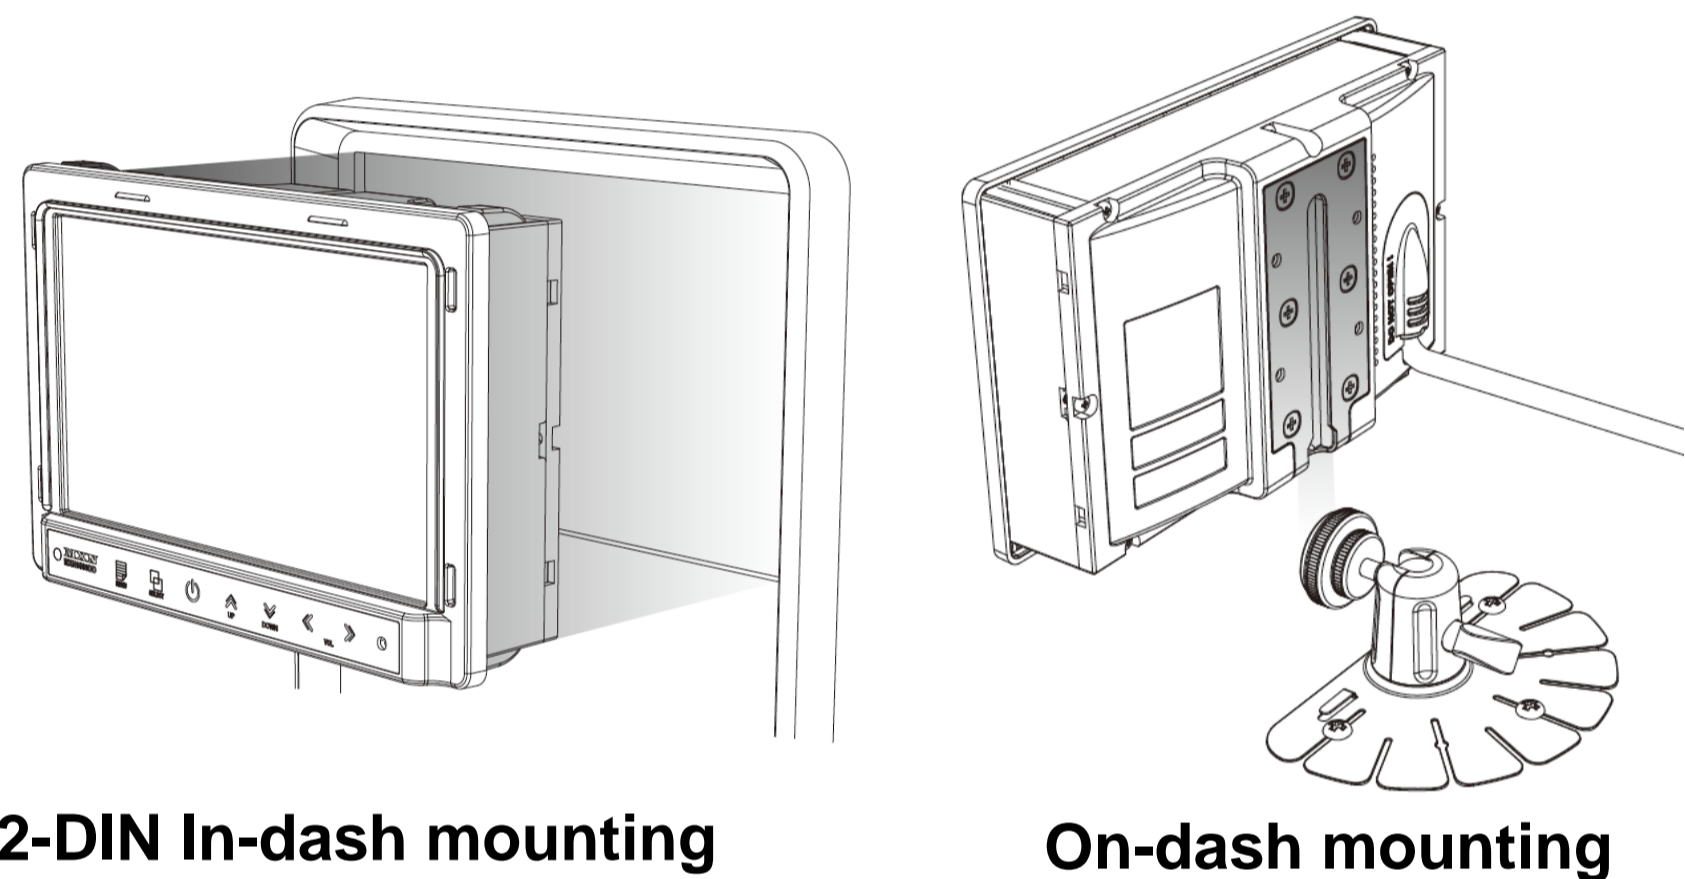

SPLIT mode

TRIPLE mode

QUAD mode



### Specifications

Power input	DC 12V ~ 30V
Power Consumption	15 Watt Max.
Video System	PAL / NTSC (1Vp-p 75Ω)
Panel	7" Digital
Resolution	800 RGB(H) X 480(V)
Format	16:9 wide
Brightness	400 cd/m2
Display Modes	Full / Split / Triple / Quad / PIP
Camera Input (4CH)	4-Pin mini DIN (MXN configuration)
A/V Input	RCA Audio / Video
Operating Temperature	-25°C ~ 75°C
Storage Temperature	-30°C ~ 85°C
Dimensions	188.07(W) X 123.57(D) X 71.33(H) mm
Weight	± 610g (excluding bracket)
O.S.D. control	Volume · Brightness · Color · Contrast · Tint · CAM 1/2/3/4 · Split · Triple · Quad · CAM Trigger 1/2/3/4 · Speedswitch · Auto Power · Distance marker · Auto Picture Scan · Dimmer · Language · Reset.